



Glo Brite® Ecō Exit™ 7000 Series PM100 Exit Signs



Going green does not have to be expensive

Job Name: _____
Type: _____
Approved By: _____
Distributor: _____

FEATURES:

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Movable if egress paths change
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 100 feet
- Recyclable
- LEED points qualified
- Listed for outdoor/wet locations

TECHNICAL INFORMATION:

Sizes: 15-7/8" x 8-5/8" x 3/8"

Letter size: 7"

Background: Black, Red, Green

Illumination: High Visibility Green

Visibility: 100 feet

Directional: 2 included (Field Applied)

Construction: ABS Plastic panel/photoluminescent lettering

Durability: Explosion-proof for areas requiring explosion-proof exit signage

TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through ETL;

Meets NFPA Life Safety Code 101 and OSHA requirements;

International Building Code 2009; International Fire Code 2009

LIFE EXPECTANCY: 25+ years

POWER REQUIREMENTS:

NO additional electrical or mechanical source required



INSTALLATION:

Surface, flag, ceiling or stem mounted (hardware included). Before installation it must be determined that there is a minimum of 5 Fc of fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.


APPLICATIONS:

Both high-level and low-level

Suitable for floor proximity installation

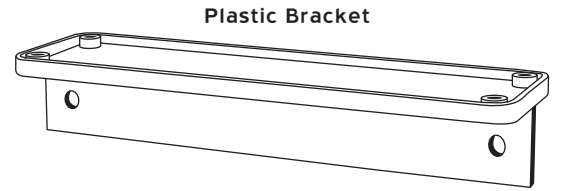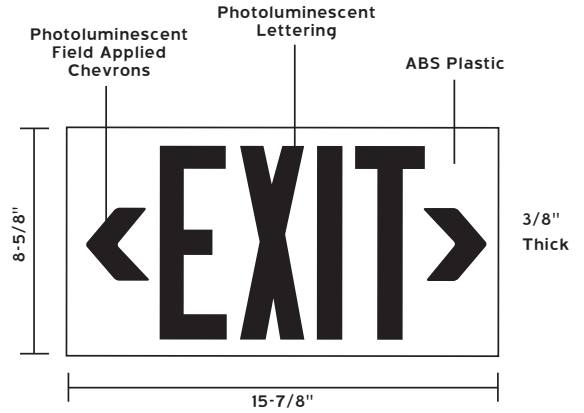

Flag Mount Option



Ceiling Mount Option

Catalog #	Frame Color	No. of Faces	
70	7 - Red	0 - Single Sided	B - Mounting Bracket
	8 - Green	2 - Double Sided	CDT-B - Conduit Bracket
	9 - Black		
70	_____	_____	-B (fill in for model #)



Jessup Manufacturing Company
 ph: 815.385.6650
 fax: 815.385.0079
 Internet: www.globritesystem.com
 E-mail: jmc@jessupmfg.com

CCMC 13211-R



Other photoluminescent components of the Glo Brite® Safety Guidance System include: Glo Brite® Egress Pathway Strips, Glo Brite® Tape, Glo Brite® Dots and Arrows, Glo Brite® Stripe Tape, Glo Brite® Safety Track, and Glo Brite® Safety Signage.