



Glo Brite® 7200 | 7300 Series P50 Exit Signs



Going green does not have to be expensive

Job Name: _____
Type: _____
Approved By: _____
Distributor: _____

FEATURES:

- Requires no additional electricity to operate and saves on energy cost
- Reliability
- Non-toxic, non-radioactive
- Low-cost, easy installation
- Designed for surface mounting
- Can be used for both high-level and low-level applications
- Requires virtually no maintenance, periodic inspections, for 25+ years
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 50 feet

TECHNICAL INFORMATION:

Sizes: 7.5" x 13" x .075"

Letter size: .8125" stroke with 6" height

Background: Photoluminescent

Illumination: High Visibility Green

Visibility: 50 feet

Directional: 2 included (Field Applied)

Construction: Plastic photoluminescent panel/red or green lettering with black plastic frame

Durability: Explosion-proof for areas requiring explosion-proof exit signage

TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through UL; Meets the (IBC) International Building Code. Meets NFPA Life Safety Code 101 and OSHA requirements; California State Fire Marshal listing #6200-1617:100; City of Los Angeles Research Report: RR 25531 (CSI #16530); Ontario Building Material Evaluation Commission Authorization Report BMEC #03-12-291; CCMC Evaluation Report CCMC 13211-R National Research Council Canada

LIFE EXPECTANCY: 25+ years

POWER REQUIREMENTS:


NO additional electrical or mechanical source required

INSTALLATION:

Surface mounted. Before installation it must be determined that there is a minimum of 5 Fc of fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.

APPLICATIONS:

Both high-level and low-level
Suitable for Floor Proximity Installation

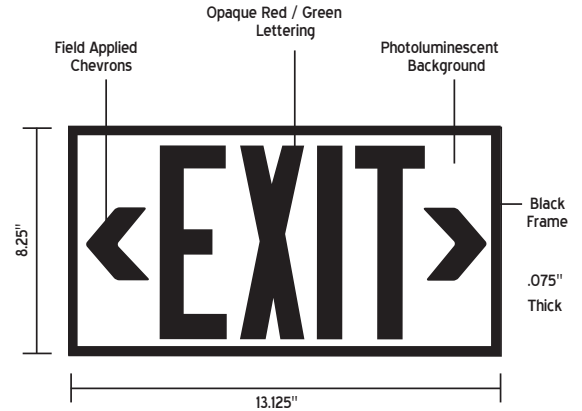

Catalog #	Letter Style	Letter Color	Chevrons
7	2 - Printed Letters	1 - Red	0 - With Chevrons (field applied) included
	3 - Reflective Letters	2 - Green	
7	_____	_____	0 (fill in for model #)

Other photoluminescent components of the Glo Brite® Safety Guidance System include: Glo Brite® Egress Pathway Strips, Glo Brite® Tape, Glo Brite® Dots and Arrows, Glo Brite® Stripe Tape, Glo Brite® Safety Track, and Glo Brite® Safety Signage.



Jessup Manufacturing Company
ph: 815.385.6650
fax: 815.385.0079
Internet: www.globritesystem.com
E-mail: jmc@jessupmfg.com

