



# Glo Brite® Ecō Exit™ 7000 Series PF50 Exit Signs



Going green does not have to be expensive

Job Name:	_____
Type:	_____
Approved By:	_____
Distributor:	_____

## FEATURES:

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Movable if egress paths change
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 50 feet
- Recyclable
- LEED points qualified

## TECHNICAL INFORMATION:

Sizes: 15-3/8" x 8-3/4" x 3/4"  
 Letter size: 7/8" stroke with 7" height  
 Background: Black, Red, Green, White  
 Illumination: High Visibility Green  
 Visibility: 50 feet  
 Directional: (2) Chevron arrows included for easy direction selection  
 Construction: ABS plastic with photoluminescent panel  
 Durability: Explosion-proof for areas requiring explosion-proof exit signage

## TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through UL;  
 Meets NFPA Life Safety Code 101 and OSHA requirements;  
 International Building Code 2009; International Fire Code 2009

**LIFE EXPECTANCY:** 25+ years

## POWER REQUIREMENTS:

NO additional electrical or mechanical source required

## INSTALLATION:



Surface, flag, ceiling or stem mounted (hardware included). Before installation it must be determined that there is a minimum of 5 Fc of fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.

## APPLICATIONS:

Both high-level and low-level  
 Suitable for floor proximity installation

Catalog #	Frame Color	No. of Faces	Mounting Bracket	
<b>70</b>	4 - Green	0 - Single Sided	<b>B</b> - Bracket	
	5 - Red	2 - Double Sided	<b>CDT-B</b> - Conduit Bracket	
	6 - Black			
<b>70</b>	_____	_____	_____ (fill in for model #)	
For example: <b>7062-B</b> (Double sided Black with bracket)				
Catalog #	Frame Color	Letter Outline	No. of Faces	Mounting Bracket
<b>7</b>	1 - White	2 - Green	0 - Single Sided	<b>B</b> - Bracket
		3 - Red	2 - Double Sided	<b>CDT-B</b> - Conduit Bracket
<b>7</b>	_____	_____	_____	_____ (fill in for model #)
For example: <b>7120-B</b> (Single sided White with Green Outline with Bracket)				

Other photoluminescent components of the Glo Brite® Safety Guidance System include:  
 Glo Brite® Egress Pathway Strips, Glo Brite® Tape, Glo Brite® Dots and Arrows,  
 Glo Brite® Stripe Tape, Glo Brite® Safety Track, and Glo Brite® Safety Signage.

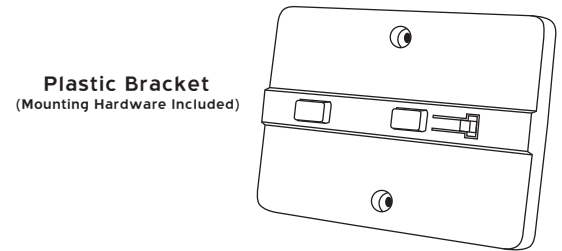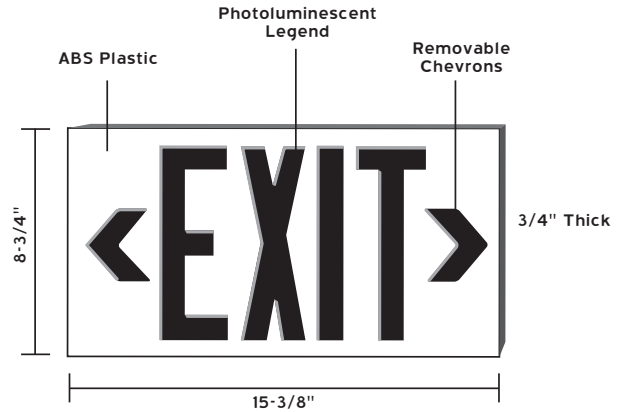

Flag Mount Option



Ceiling Mount Option



Jessup Manufacturing Company  
 ph: 815.385.6650  
 fax: 815.385.0079  
 Internet: www.globritesystem.com  
 E-mail: jmc@jessupmfg.com

