



# Glo Brite® Ecō Exit™ 7000 Series S50 Exit Signs



Going green does not have to be expensive

|                    |
|--------------------|
| Job Name: _____    |
| Type: _____        |
| Approved By: _____ |
| Distributor: _____ |

## FEATURES:

- Requires no additional electricity to operate
- Reliability
- Non-toxic, non-radioactive
- Low-cost, easy installation
- Designed for surface, flag or ceiling mounting
- Can be used for both high-level and low-level applications
- Requires virtually no maintenance, periodic inspections, for 25+ years
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 50 feet
- Saves on energy costs

## TECHNICAL INFORMATION:

Sizes: 8-1/4" x 15-1/4" x 1/4"

Letter size: 7/8" stroke with 7" height

Background: Black, Red, Green or White

Illumination: High Visibility Green

Visibility: 50 feet

Directional: Pop-out chevron arrows for easy direction selection

Construction: .035 steel and a plastic photoluminescent panel

Durability: Explosion-proof for areas requiring explosion-proof exit signage

## TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through UL; ICC ES # 6040, meeting all current building codes, meets NFPA Life Safety Code 101 and OSHA requirements; California State Fire Marshal listing #6200-1617:100; City of Los Angeles Research Report: RR 25531 (CSI #16530); Ontario Building Material Evaluation Commission Authorization Report BMEC #03-12-291; CCMC Evaluation Report CCMC 13211-R National Research Council Canada

**LIFE EXPECTANCY:** 25+ years

## POWER REQUIREMENTS:

NO additional electrical or mechanical source required

## INSTALLATION:



Surface, flag, ceiling or stem mounted (hardware included). Before installation it must be determined that there is a minimum of 5 Fc of fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.

## APPLICATIONS:

Both high-level and low-level  
Suitable for floor proximity installation

| Catalog #                                                    | Frame Color      | No. of Faces            | Mounting Bracket                                                             |
|--------------------------------------------------------------|------------------|-------------------------|------------------------------------------------------------------------------|
| <b>70</b>                                                    | <b>0</b> - Black | <b>1</b> - Single Sided | <b>B</b> - Optional for Single Sided Sign<br>Necessary for Double Sided Sign |
|                                                              | <b>1</b> - Red   | <b>2</b> - Double Sided |                                                                              |
|                                                              | <b>2</b> - Green |                         |                                                                              |
|                                                              | <b>3</b> - White |                         |                                                                              |
| <b>70</b>                                                    | _____            | - _____                 | (fill in for model #)                                                        |
| For example: <b>7002-B</b> (Double sided Black with bracket) |                  |                         |                                                                              |

Other photoluminescent components of the Glo Brite® Safety Guidance System include:  
Glo Brite® Egress Pathway Strips, Glo Brite® Tape, Glo Brite® Dots and Arrows,  
Glo Brite® Stripe Tape, Glo Brite® Safety Track, and Glo Brite® Safety Signage.

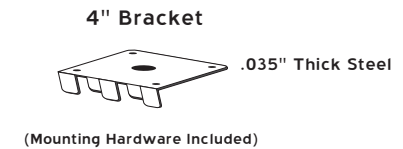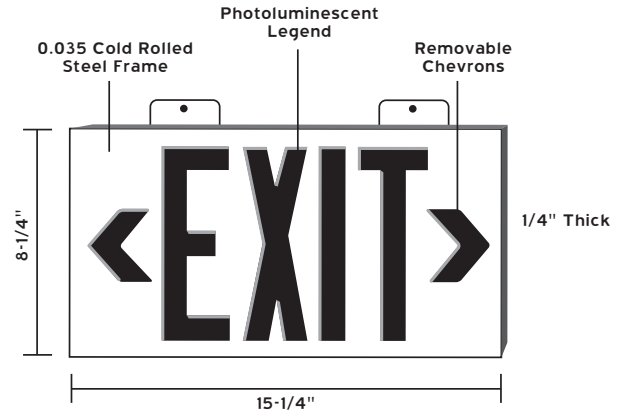

Jessup Manufacturing Company  
ph: 815.385.6650  
fax: 815.385.0079  
Internet: www.globritesystem.com  
E-mail: jmc@jessupmfg.com

